















PrintTex®

Artist Heavy

Fields of application

.01 .02 .04 .05 .07

Specifications

-  **REF.** 564250 042
-  100 % polyester
-  ca. 252/ 310/ 505 cm
ca. 99/ 122/ 199 inch
other widths available on request
-  B-s1, d0 DIN EN 13501-1
-  ca. 280 g/m²
ca. 7.4 oz/yd²
-  ca. 0.40 mm
ca. 400 µm
-  rolls
50 m
55 yd
-  warp: 1831.6 N (132.9 N)
weft: 2288.7 N (89.9 N)
DIN EN ISO 13934-1 (13937-2)
-  warp: 60.7 %
weft: 32.3 %
DIN EN ISO 13934-1
-  **Light**
blank: 26.9 %
DIN EN 410
-  **UV**
blank: 0.0 %
DIN EN 410
-  blank: 91.01
DIN 5033-1
-  warp: 0.6 %
weft: 0.3 %
DIN EN 14704-1
-  cold, heat, ultrasonic cut

Printing methods

print	UV	Latex	Dyesub
Inside	•	•	
Outside			


Certifications



PrintTex® Artist Heavy

Fields of application

.01 .02 .04 .05 .07

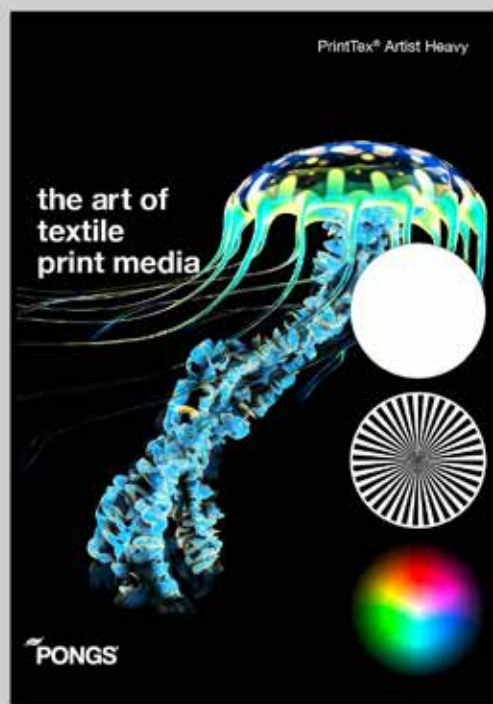

Ref.-Nr.: 564250 042 | Preview print sample